


MODEL
T-311

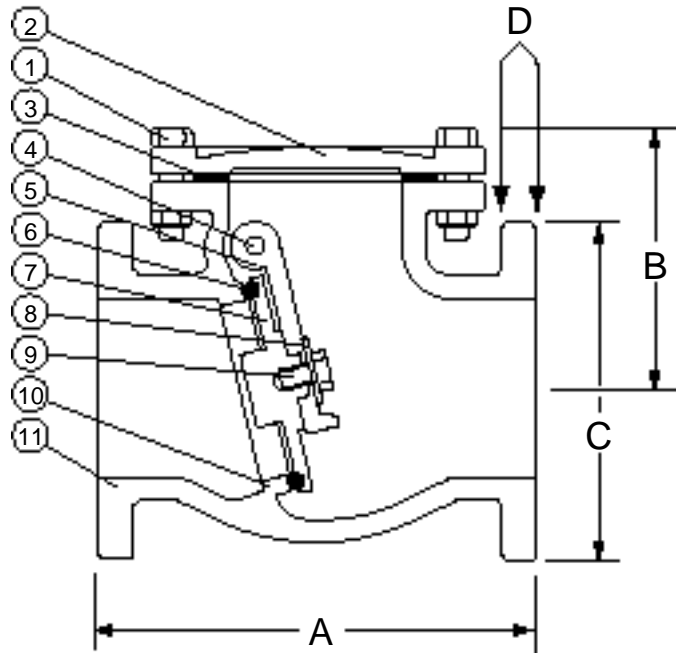

PRESSURE RATING

- CLASS 125
- 125 WSP TO 450° F
- 200 WOG NON-SHOCK

FEATURES

- IRON BODY
- BRONZE TRIM
- BOLTED BONNET
- FLANGED ENDS
- SOLID WEDGE
- REPLACEABLE SEAT RINGS AND HINGE PIN
- HORIZONTAL AND VERTICLE APPLICATIONS
- MEETS MSS SP-71, TYPE 1
- MANUFACTURED IN AN ISO-9002 CERTIFIED FACILITY

DIMENSIONS IN INCHES

VALVE SIZE	A	B	C	D
2"	8"	4"	6"	5/8"
2 1/2"	8 1/2"	4 1/2"	7"	11/16"
3"	9 1/2"	5 1/8"	7 1/2"	3/4"
4"	11 1/2"	6 1/8"	9"	15/16"
5"	13"	6 13/16"	10"	15/16"
6"	14"	8"	11"	1"
8"	19 1/2"	9 7/16"	13 1/2"	1 1/8"

MATERIAL SPECIFICATIONS

NO.	PART	MATERIALS	
1	COVER BOLT & NUT	STEEL	ASTM A307
2	COVER	CAST IRON	ASTM A126 CLASS B
3	GASKET	NON-ASBESTOS	
4	HANGER PIN	STAINLESS STEEL	
5	HANGER	CAST IRON	ASTM A126 CLASS B
6	DISC RING	BRONZE	ASTM B62
7	DISC	CAST IRON	ASTM A126 CLASS B
8	DISC WASHER	STEEL	ASTM A307
9	DISC BOLT	STEEL	ASTM A307
10	SEAT RING	BRONZE	ASTM B62
11	BODY	CAST IRON	ASTM A126 CLASS B