

H-20 Hatch/Access Cover



TOPP's **H-20 Hatch/Access Covers** are designed for a load rating of 16,000 lbs with a 30% impact factor, applied over a 10" x 20" area. Intended for use in off-street locations with occasional traffic - sidewalks, medians, parking lots and road shoulders are examples of acceptable locations for installation. Also acceptable for use in parking garages.

Cover Options:

- Round or square cover
- Solid, gas tight hatch or hinged hatch
- Available in 18", 24", 30", 36", 42", 48" 60" & 72" diameter (larger upon request)

Features Include:


- 5/8" thick ASTM A36 smooth steel
- Steel curb frame w/ anchor legs
- Hot dipped galvanized finish
- Threaded holes for eyebolts to assist in lifting

Optional Features:

- Tread plate steel
- Fall through protection



TOPP has the ability to custom manufacture varied products & accessories to fit your needs

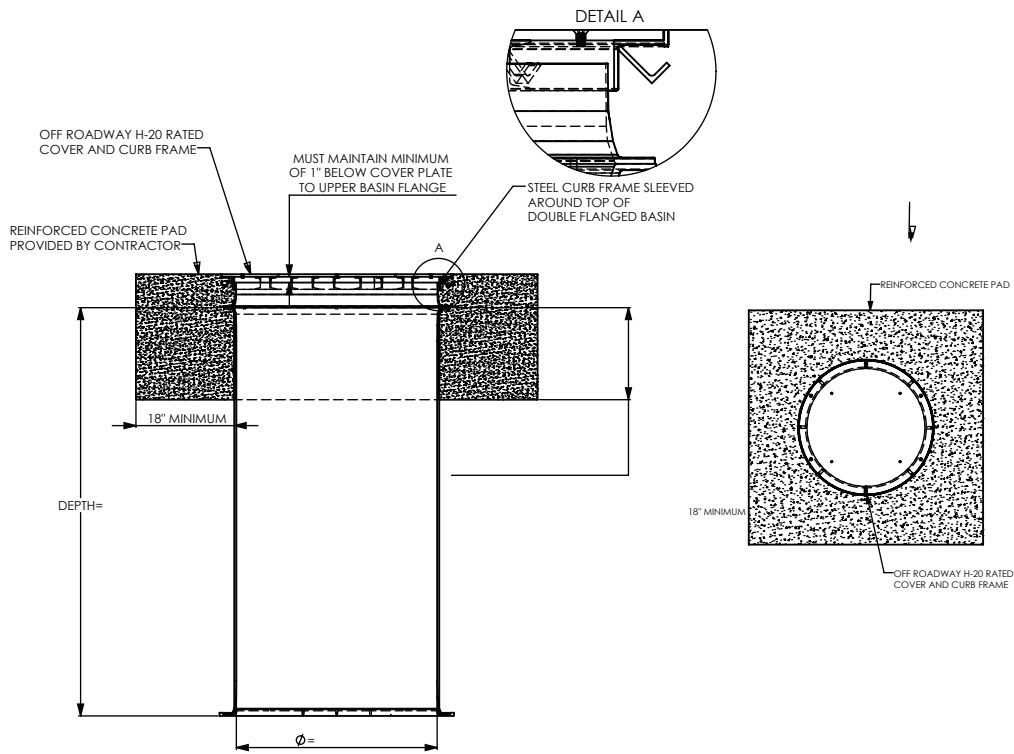

Part No.	Style*	Inside Dim.	Outside Dim.	Bolt Circle	Thickness	Clear Access (Hatch)
C18WS-20	Round - Solid	18"	22 7/8"	21"	5/8"	n/a
C24WS-20	Round - Solid	24"	28 7/8"	27"	5/8"	n/a
C30WS-20	Round - Solid	30"	34 7/8"	33"	5/8"	15" X 20"
C30HSS- 20	Round - Hatch					
C30HSSX-20	Round - Gas Tight Hatch					
C36WS-20	Round - Solid	36"	42 7/8"	40"	5/8"	19 3/4" X 24 1/8"
C36HSS- 20	Round - Hatch					
C36HSSX-20	Round - Gas Tight Hatch					
C42WS-20	Round - Solid	42"	48 7/8"	46"	5/8"	20 3/4" X 30 3/4"
C42HSS- 20	Round - Hatch					
C42HSSX-20	Round - Gas Tight Hatch					
C48WS-20	Round - Solid	48"	54 7/8"	52"	5/8"	22" X 34 1/4"
C48HSS- 20	Round - Hatch					
C48HSSX-20	Round - Gas Tight Hatch					
C60WS-20	Round - Solid	60"	66 3/4"	64"	5/8"	25 7/8" X 36"
C60HSS- 20	Round - Hatch					
C60HSSX-20	Round - Gas Tight Hatch					
C72WS-20	Round - Solid	72"	78 5/8"	76"	5/8"	30 3/4" X 45"
C72HSS- 20	Round - Hatch					
C72HSSX-20	Round - Gas Tight Hatch					

*Square covers available